


Interface Module RS232/485

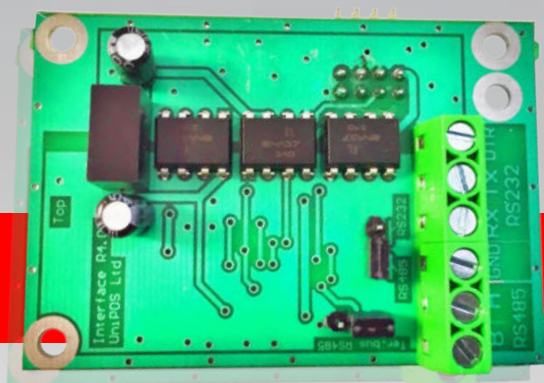

The Interface Module RS232/485 is fully compatible with the FS5100 and FS5200 UniPOS conventional panels. Applicable for PC application and Conventional Network Repeater integration.

Technical data

The Interface Module RS232/485 is designed for implementing the communication function between fire control panels and a personal computer or between fire control panels, connected into a network.

Power supply (the module is power supplied from the fire control panel via a ribbon cable):
– (5 ± 0.25) V DC

Operational temperature range: from -5°C to $+40^{\circ}\text{C}$
Relative humidity resistance: $(93 \pm 3)\%$ at 40°C
Dimensions: 167mm x 50mm x 44mm

Nominal current:
– 10mA



Office building UniPOS,
1 Efr. Nikola Paskalev Str., Mladost 1, Sofia 1748, Bulgaria
Phone: +359 2 97 439 25, +359 2 97 444 69

47 San Stefano Str., Pleven 5800, Bulgaria
Phone: +359 64 891 100

www.unipos-bg.com

UniPOS Ltd. reserves the right to alter the specifications of its products without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by UniPOS Ltd. to be a complete and up-to-date description. No liability is accepted for any consequence of the use of this document.